


VENIZETTE VE920



LATEX ON INTERLOCK COTTON LINING GLOVE - LENGTH: 30 CM

Ref. VE920

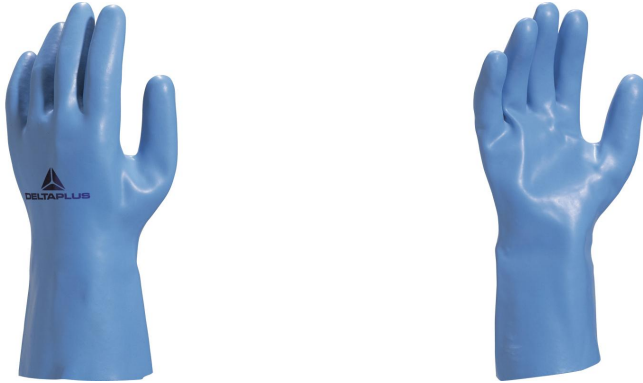

Product specifications

Latex on interlock cotton lining. Length: 30 cm. Thickness: 1,25 mm.

Support: 100% Interlock cotton.

Coating: 100% natural latex.

Tested according to EN374-3:2003 determination of permeation resistance, levels of permeation from 1 to 6 (A : Methanol = 2, K : Sodium hydroxyde 40% (NaOH) = 6, L: Sulphuric Acid 96% = 6, sodium hydroxide (20%) = 6, Hydrochloric acid 10% = 6, Formaldehyde 37% = 6, acetic acid 25% = 6).

COLOUR

Blue

SIZE

6/7, 7/8, 8/9, 9/10, 10/11

Product Use - Risks



Heat



Biological chemical particles



Wearing



Construction / Civil engineering




Heavy industry



Oil / Gas



Mining

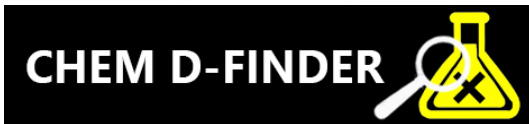

Product's highlights & user's benefits



Cotton lining :

- Better mechanical and thermal protection
- Better comfort

Maximum abrasion resistance
Suppleness



100°C



1.25 mm



Certifications and Standards



PPE DIRECTIVE EC 89/686

EN420:2003+A1:2009 General requirements

5: Dexterity (from 1 to 5)

EN388:2003 Protective gloves against mechanical Risks (Levels obtained on the palm)



4: Resistance to abrasion (from 1 to 4)

1: Resistance to cutting (from 1 to 5)

2: Resistance to tear (from 1 to 4)

1: Resistance to puncture (1 to 4)

EN374-3:2003 Protective gloves against chemicals and micro-organisms - Part 3:

Determination of resistance to permeation by chemicals



AKL: Resistant gloves to permeation by chemicals, tested according to EN374-3

A 2 > 30 mn: Méthanol (A) CAS 67-56-1

K 6 > 480 mn: Caustic soda 40% (K) CAS 1310-73-2

L 6 > 480 mn: Sulphuric acid 96 % (L) CAS 7664-93-9

EN407:2004 Protective gloves against Heat & Fire risks (X = Unrealized test)



X: Resistance to flammability (from 1 to 4)

1: Resistance to contact heat (from 1 to 4)

X: Resistance to convective heat (from 1 to 4)

X: Resistance to radiant heat (from 1 to 4)

X: Resistance to small projections of liquid metal (from 1 to 4)

X: Resistance to large projections of molten metal (from 1 to 4)





REGULATION (EU) 1935/2004 CONTACT WITH FOOD PRODUCTS

GLOB MIGR Food contact - Overall Migration

∴ Contact with any type of food

References

References	Bar code	COLOUR	SIZE		
VE920BL06	3295249008734	Blue	6/7	120	12
VE920BL07	3295249008741	Blue	7/8	120	12
VE920BL08	3295249008758	Blue	8/9	120	12
VE920BL09	3295249008765	Blue	9/10	120	12
VE920BL10	3295249008772	Blue	10/11	120	12